

**GGW100G | 9.0L | 100kVA**

**INDUSTRIAL SPARK-IGNITED GENERATOR SET**

PRAMAC | Power Engineering Division



\*Assembled in the USA using domestic and foreign parts

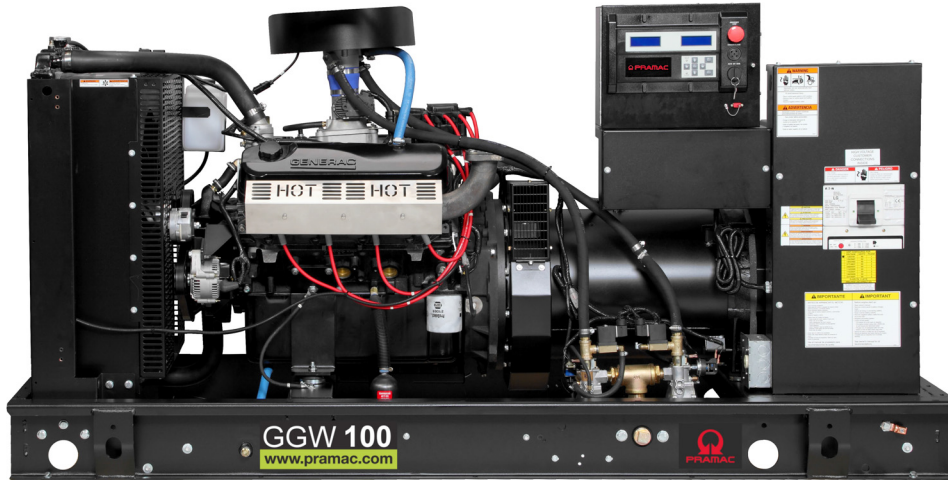


Image used for illustration purposes only

Power Ratings		
GGW100	Standby	100kVA/80kW
	Prime	90kVA/72 kW

## Codes and Standards

PRAMAC products are designed to the following standards:



BS5514 and DIN 6271



SAE J1349



NFPA 37, 70, 99, 110



NEC700, 701, 702, 708



ISO 3046, 7637, 8528, 9001



NEMA ICS10, MG1, 250, ICS6, AB1



ANSI C62.41



IBC 2009, CBC 2010, IBC 2012, ASCE 7-05, ASCE 7-10, ICC-ES AC-156 (2012)

## ENERGY GENERATION

PRAMAC ensures superior quality and performance by managing all aspects of production: from design to manufacturing.

PRAMAC can trace its roots back to 1966; from then onwards it has been expanding its activity in the energy and material-handling sector, continuously growing globally with a wide and flexible product range.

In the field of power generation, PRAMAC offers solutions for every kind of power supply demand: portable and industrial generators for stand by and prime power applications and mobile and towable lighting for outdoor needs.

PRAMAC operates through a wide distribution network and provides global coverage even in the most demanding markets.



**STANDARD FEATURES**

**ENGINE SYSTEM**

- Oil Drain Extension
- Heavy Duty Air Cleaner
- Fan Guard
- Stainless Steel Flexible Exhaust Connection
- Factory Filled Oil and Coolant
- Radiator Duct Adapter (Open Set Only)
- Critical Exhaust Silencer (Enclosed Only)

**Fuel System**

- Fuel Line - NPT Connection
- Primary and Secondary Fuel Shutoff

**Cooling System**

- Closed Coolant Recovery System
- UV/Ozone Resistant Hoses
- Factory-Installed Radiator
- 50/50 Ethylene Glycol Antifreeze

**Electrical System**

- Battery Charging Alternator
- Battery Cables
- Battery Tray
- Rubber-Booted Engine Electrical Connections
- Solenoid Activated Starter Motor

**ALTERNATOR SYSTEM**

- GENprotect™
- Class H Insulation Material
- 2/3 Pitch
- Skewed Stator
- Brushless Excitation
- Sealed Bearing
- Amortisseur Winding
- Full Load Capacity Alternator

**GENERATOR SET**

- Internal Genset Vibration Isolation
- Separation of Circuits - High/Low Voltage
- Separation of Circuits - Multiple Breakers
- Wrapped Exhaust Piping (Enclosed Only)
- Standard Factory Testing
- 1 Year Limited Warranty or 1,000 Hours
- Silencer Mounted in the Discharge Hood (Enclosed Only)

**ENCLOSURE (If Selected)**

- Rust-Proof Fasteners with Nylon Washers to Protect Finish
- High Performance Sound-Absorbing Material (Sound Attenuation Enclosures)
- Gasketed Doors
- Stamped Air-Intake Louvers
- Upward Facing Discharge Hoods (Radiator and Exhaust)
- Stainless Steel Lift Off Door Hinges
- Stainless Steel Lockable Handles
- RhinoCoat™ - Textured Polyester Powder Coat Paint

**CONTROL SYSTEM**



**Digital H Control Panel- Dual 4x20 Display**

**Program Functions**

- Programmable Crank Limiter
- 7-Day Programmable Exerciser
- Special Applications Programmable Logic Controller
- RS-232/485 Communications
- 3-Phase Sensing Digital Voltage Regulator
- 2-Wire Start Capability
- Date/Time Fault History (Event Log)
- Isochronous Governor Control
- Waterproof/Sealed Connectors
- Audible Alarms and Shutdowns
- Not in Auto (Flashing Light)

- Auto/Off/Manual Switch
- E-Stop (Red Mushroom-Type)
- NFPA110 Level I and II (Programmable)
- Customizable Alarms, Warnings, and Events
- Modbus® Protocol
- Predictive Maintenance Algorithm
- Sealed Boards
- Password Parameter Adjustment Protection
- Single Point Ground
- 16 Channel Remote Trending
- 0.2 msec High Speed Remote Trending
- Alarm Information Automatically Annunciated on the Display

**Full System Status Display**

- Power Output (kW)
- Power Factor
- kW Hours, Total, and Last Run
- Real/Reactive/Apparent Power
- All Phase AC Voltage
- All Phase Currents
- Oil Pressure
- Coolant Temperature
- Coolant Level

- Engine Speed
- Battery Voltage
- Frequency

**Alarms and Warnings**

- Oil Pressure
- Coolant Temperature
- Coolant Level
- Low Fuel Pressure Alarm
- Engine Overspeed
- Battery Voltage
- Alarms and Warnings Time and Date Stamped
- Snap Shots of Key Operation Parameters During Alarms and Warnings
- Alarms and Warnings Spelled Out (No Alarm Codes)



## CONFIGURABLE OPTIONS

---

### ENGINE SYSTEM

- Engine Coolant Heater
- Air Filter Restriction Indicator
- Stone Guard (Open Set Only)
- Critical Exhaust Silencer (Open Set Only)

### ELECTRICAL SYSTEM

- 10A Battery Charger

### ALTERNATOR SYSTEM

- Alternator Upsizing
- Anti-Condensation Heater
- Tropical Coating
- Permanent Magnet Excitation

### CIRCUIT BREAKER OPTIONS

- Main Line Circuit Breaker
- Shunt Trip and Auxiliary Contact
- Electronic Trip Breaker

### GENERATOR SET

- GenLink Communications Software (English Only)
- Extended Factory Testing (3-Phase Only)
- Pad Vibration Isolators

### ENCLOSURE

- Weather Protected Enclosure
- Level 1 Sound Attenuation
- Level 2 Sound Attenuation
- Level 2 Sound Attenuation with Motorized Dampers
- Steel Enclosure
- Aluminum Enclosure
- Up to 321 KMH Wind Load Rating\*
- AC/DC Enclosure Lighting Kit
- Door Open Alarm Switch

### CONTROL SYSTEM

- 21-Light Remote Annunciator
- Remote Relay Assembly (8 or 16)
- Oil Temperature Indicator with Alarm
- Remote E-Stop (Break Glass-Type, Surface Mount)
- Remote E-Stop (Red Mushroom-Type, Surface Mount)
- Remote E-Stop (Red Mushroom-Type, Flush Mount)
- Remote Communication - Modem
- 10A Run Relay

## ENGINEERED OPTIONS

---

### ENGINE SYSTEM

- Coolant Heater Ball Valves
- Fluid Containment Pan

### ALTERNATOR SYSTEM

- 3rd Breaker System

### CONTROL SYSTEM

- Spare Inputs (x4) / Outputs (x4)
- Battery Disconnect Switch

### GENERATOR SET

- Special Testing
- Battery Box

\*Consult factory for availability

# GGW100G | 9.0L | 100kVA

## INDUSTRIAL SPARK-IGNITED GENERATOR SET

PRAMAC | Power Engineering Division



### APPLICATION AND ENGINEERING DATA

#### ENGINE SPECIFICATIONS

##### General

Make	Generac
Cylinder #	8
Type	V
Displacement - L (Cu In)	8.9 (540)
Bore - mm (in)	114.23 (4.49)
Stroke - mm (in)	107.15 (4.25)
Compression Ratio	10.5:1
Intake Air Method	Naturally Aspirated
Number of Main Bearings	5
Connecting Rods	Forged Steel
Cylinder Head	Cast Iron
Cylinder Liners	No
Ignition	High Energy
Piston Type	Aluminum Alloy
Crankshaft Type	Forged Steel
Lifter Type	Hydraulic Roller
Intake Valve Material	Steel Alloy
Exhaust Valve Material	Stainless Steel
Hardened Valve Seats	Yes

##### Engine Governing

Governor	Electronic
Frequency Regulation (Steady State)	±0.25%

##### Lubrication System

Oil Pump Type	Gear
Oil Filter Type	Full-Flow Spin-On Cartridge
Crankcase Capacity - L (qts)	8.5 (8.0)

#### ALTERNATOR SPECIFICATIONS

Standard Model	Generac 390 mm
Poles	4
Field Type	Revolving
Insulation Class - Rotor	H
Insulation Class - Stator	H
Total Harmonic Distortion	<5% (3-Phase)
Telephone Interference Factor (TIF)	<50

##### Cooling System

Cooling System Type	Pressurized Closed Recovery
Fan Type	Pusher
Fan Speed (rpm)	1,934
Fan Diameter - mm (in)	558 (22)

##### Fuel System

Fuel Type	Natural Gas, Propane
Carburetor	Down Draft
Secondary Fuel Regulator	Standard
Fuel Shut Off Solenoid	Standard (Dual)
Operating Fuel Pressure in H <sub>2</sub> O (kPa)	11-14 (2.7-3.5)
Optional Operating Fuel Pressure in H <sub>2</sub> O (kPa)	7-11 (1.7-2.7)

##### Engine Electrical System

System Voltage	12 VDC
Battery Charger Alternator	Standard
Battery Size	See Battery Index 10000016949
Battery Voltage	12 VDC
Ground Polarity	Negative

Standard Excitation	Synchronous Brushless
Bearings	Sealed Ball
Coupling	Direct Drive
Prototype Short Circuit Test	Yes
Voltage Regulator Type	Full Digital
Number of Sensed Phases	All
Regulation Accuracy (Steady State)	±0.25%

# GGW100G | 9.0L | 100kVA

## INDUSTRIAL SPARK-IGNITED GENERATOR SET

PRAMAC | Power Engineering Division



### OPERATING DATA

#### POWER RATINGS - NATURAL GAS/PROPANE VAPOR

	Standby	Prime
Three Phase 231/400 VAC @0.8pf	100 kVA/80 kW Amps: 144	90 kVA/72 kW Amps: 130

#### STARTING CAPABILITIES (sKVA)

##### sKVA vs. Voltage Dip

##### 231/400 VAC

Alternator	kW	10%	15%	20%	25%	30%	35%
Standard	100	66	98	130	164	196	228
Upsize 1	130	96	144	193	241	289	337

#### FUEL CONSUMPTION RATES\*

##### Natural Gas – m<sup>3</sup>/hr (ft<sup>3</sup>/hr)

Percent Load	Standby	Prime
25%	9.7 (342)	8.7 (307.8)
50%	16.6 (586)	14.9 (527.4)
75%	22.4 (792)	20.6 (712.8)
100%	27.7 (977)	24.9 (879.3)

##### Liquid Propane Vapor – m<sup>3</sup>/hr (ft<sup>3</sup>/hr)

Percent Load	Standby	Prime
25%	3.9 (137.9)	3.5 (124.1)
50%	6.7 (234.4)	6.0 (211.0)
75%	9.0 (319.2)	8.1 (287.3)
100%	11.2 (394.1)	10.1 (354.7)

\* Fuel supply installation must accommodate fuel consumption rates at 100% load.

#### COOLING

		Standby	Prime
Air Flow (Inlet Air Combustion and Radiator)	m <sup>3</sup> /min (ft <sup>3</sup> /min)	131.4 (4,638)	131.4 (4,638)
Coolant Flow	gal/min	21.0 (79)	21.0 (79)
Coolant System Capacity	l (gal)	22.7 (6.0)	22.7 (6.0)
Heat Rejection to Coolant	BTU/hr (kW)	330,000 (97)	297,000 (87.3)
Maximum Operating Ambient Temperature	°C (°F)	50 (122)	50 (122)
Maximum Operating Ambient Temperature (Before Derate)		See Bulletin No. 10000011319	
Maximum Radiator Backpressure	in H <sub>2</sub> O (kPa)	0.5 (0.12)	0.5 (0.12)

#### COMBUSTION AIR REQUIREMENTS

	Standby	Prime
Flow at Rated Power m <sup>3</sup> /min (cfm)	6.1 (220)	5.7 (207)

#### ENGINE

		Standby	Prime
Rated Engine Speed	rpm	1,500	1,500
Horsepower at Rated kW**	hp	119	95
Piston Speed	m/min (ft/min)	324 (1,062)	324 (1,062)
BMEP	psi	121	104

#### EXHAUST

		Standby	Prime
Exhaust Flow (Rated Output)	m <sup>3</sup> /min (cfm)	21.6 (676)	21.6 (676)
Max. Allowable Backpressure	inHg (kPa)	1.5 (5.1)	1.5 (5.1)
Exhaust Temp (Rated Output - Post Silencer)	°C (°F)	596 (1,104)	547 (1,016)



\*\* Refer to "Emissions Data Sheet" for maximum bHP for EPA and SCAQMD permitting purposes.

Deration - See Bulletin No. 10000011319.

Standby - See Bulletin No. 10000018933.



Prime - See Bulletin No. 10000018926.

**DIMENSIONS AND WEIGHTS\***





**OPEN SET (Includes Exhaust Flex)**

L x W x H mm (in)	2,394 (94.2) x 1,016 (40) x 1,206 (47.5)
Weight kg (lbs)	936.2 (2,064)

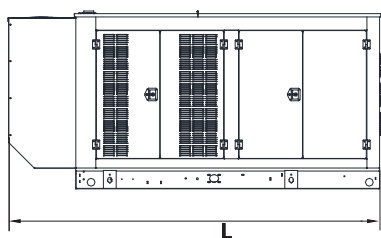



**STANDARD ENCLOSURE**

L x W x H mm (in)	2,839.5 (111.79) x 1,027.8 (40.46) x 1,427 (56.18)
Weight kg (lbs)	Steel: 1,228 (2,708) Aluminum: 1,094 (2,413)

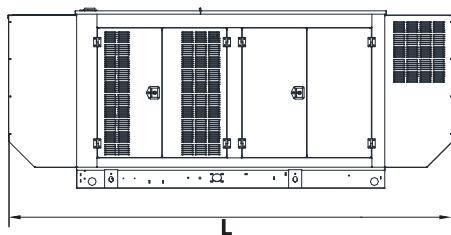

**LEVEL 1 ACOUSTIC ENCLOSURE**

L x W x H mm (in)	3,287.2 (129.42) x 1,027.8 (40.46) x 1,427 (56.18)
Weight kg (lbs)	Steel: 1,269.2 (2,798) Aluminum: 1,068 (2,355)

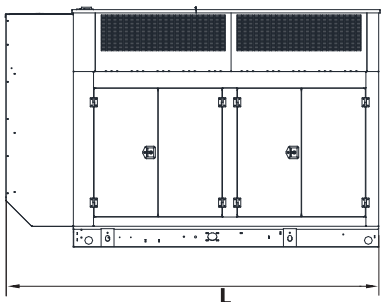

**LEVEL 2 ACOUSTIC ENCLOSURE**

L x W x H mm (in)	2,840 (111.81) x 1,027.8 (40.46) x 1,742.8 (68.61)
Weight kg (lbs)	Steel: 1,370.8 (3,022) Aluminum: 1,103 (2,431)

\* Specification characteristics may change without notice. Dimensions and weights are for preliminary purposes only. Please consult a PRAMAC Industrial Dealer for detailed installation drawings.